


B 7505

Pressboard screws

Countersunk head | hexalobular drive

Steel | zinc-plated | Cr(VI)-free | Wood thread

Further information: With partial thread from length 70 mm.

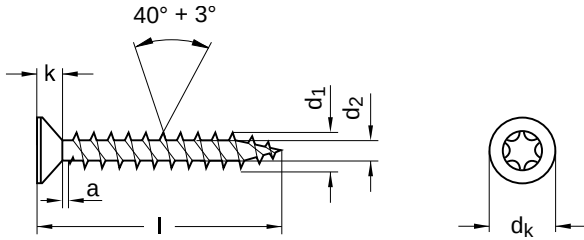

Diameter (d)	Tool size	a max.	d ₁		d ₂		d _k		k	
			min.	max.	min.	max.	min.	max.	min.	max.
3	T10	1.8	2.80	3.0	1.75	2.00	5.6	6	1.6	1.9
3.5	T15	2.0	3.30	3.5	2.00	2.25	6.6	7	1.8	2.1
4	T20	2.2	3.75	4.0	2.25	2.50	7.5	8	2.1	2.5
4.5	T25	2.4	4.25	4.5	2.45	2.70	8.5	9	2.3	2.7
5	T25	2.7	4.70	5.0	2.80	3.10	9.5	10	2.6	3.0
6	T30	3.4	5.70	6.0	3.50	3.80	11.5	12	3.1	3.6

nominal size	Length (l)	
	min.	max.
16	15.10	16
20	18.90	20
25	23.90	25
30	28.90	30
35	33.70	35
40	38.70	40
45	43.70	45
50	48.70	50

nominal size	Length (l)	
	min.	max.
55	53.50	55
60	58.50	60
70	68.50	70
80	78.25	80
90	88.25	90
100	98.25	100
120	118.30	120
130	128.00	130

nominal size	Length (l)	
	min.	max.
140	138.00	140
150	148.00	150
160	158.00	160

Diameter (d)	Length (l)																		
	16	20	25	30	35	40	45	50	55	60	70	80	90	100	120	130	140	150	160
3	●	●	●	●															
3.5	●	●	●	●	●	●										●			
4		●	●	●	●	●	●	●		●									●
4.5		●	●	●	●	●	●	●	●	●	●								
5		●			●	●		●	●	●	●	●	●	●					
6						●		●		●	●	●	●	●	●		●	●	●

• Combinations available in the eShop | Other sizes on request

All technical data refer to the measure mm

