



B 7505

Pressboard screws

Countersunk head | cross-slot pozidriv

Steel | zinc-plated | Cr(VI)-free | Wood thread

Further information: With partial thread from length 70 mm.

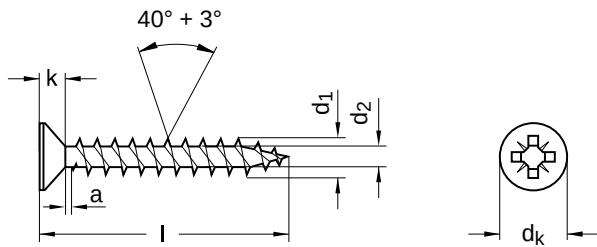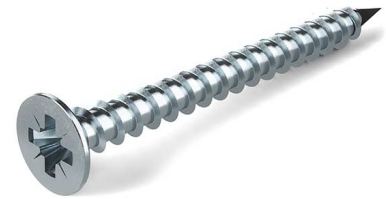

Diameter (d)	Tool size	a max.	d ₁		d ₂		d _k		k	
			min.	max.	min.	max.	min.	max.	min.	max.
3	Z1	1.8	2.80	3.0	1.75	2.00	5.6	6	1.6	1.9
3.5	Z2	2.0	3.30	3.5	2.00	2.25	6.6	7	1.8	2.1
4	Z2	2.2	3.75	4.0	2.25	2.50	7.5	8	2.1	2.5
4.5	Z2	2.4	4.25	4.5	2.45	2.70	8.5	9	2.3	2.7
5	Z2	2.7	4.70	5.0	2.80	3.10	9.5	10	2.6	3.0
6	Z3	3.4	5.70	6.0	3.50	3.80	11.5	12	3.1	3.6

nominal size	Length (l)	
	min.	max.
10	9.20	10
12	11.10	12
16	15.10	16
20	18.90	20
25	23.90	25
30	28.90	30
35	33.70	35
40	38.70	40

nominal size	Length (l)	
	min.	max.
45	43.70	45
50	48.70	50
55	53.50	55
60	58.50	60
70	68.50	70
80	78.25	80
90	88.25	90
100	98.25	100

nominal size	Length (l)	
	min.	max.
110	108.30	110
120	118.30	120
160	158.00	160

Diameter (d)	Length (l)																		
	10	12	16	20	25	30	35	40	45	50	55	60	70	80	90	100	110	120	160
3	●	●	●	●	●	●	●	●											
3.5		●	●	●	●	●	●	●	●	●									
4		●	●	●	●	●	●	●	●	●	●	●	●						
4.5			●	●	●	●	●	●	●	●	●	●	●	●					
5			●	●	●	●	●	●	●	●	●	●	●	●		●			
6							●	●	●			●	●	●	●	●	●	●	●

• Combinations available in the eShop | Other sizes on request

All technical data refer to the measure mm

