


DIN 911 similar to ISO 2936

Hexagon socket screw key

For hexagon socket screws DIN 912, 7984 and 7991 respectively threaded pins ISO 4026-4029

Steel 10.9 | zinc-plated | Cr(VI)-free

Further information: DIN-standard has been withdrawn

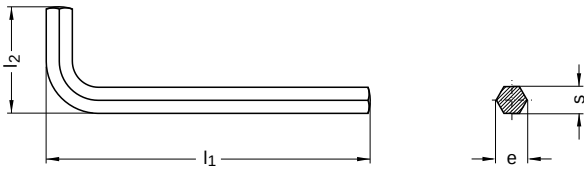

| Diameter (d) | e | | l ₁ | l ₂ | nominal size | s | | Tool size |
|-----------------|-------|-------|----------------|----------------|--------------|-------|-------|--------------|
| | max. | min. | | | | min. | max. | |
| SW 2.5 | 2.82 | 2.75 | 56 | 18 | 2.5 | 2.52 | 2.56 | SW 2,5 |
| SW 3 | 3.39 | 3.31 | 63 | 20 | 3.0 | 3.02 | 3.08 | SW 3 |
| SW 4 | 4.53 | 4.44 | 70 | 25 | 4.0 | 4.02 | 4.10 | SW 4 |
| SW 5 | 5.67 | 5.58 | 80 | 28 | 5.0 | 5.02 | 5.10 | SW 5 |
| SW 6 | 6.81 | 6.71 | 90 | 32 | 6.0 | 6.02 | 6.10 | SW 6 |
| SW 7 | 7.95 | 7.84 | 95 | 34 | 7.0 | 7.02 | 7.12 | SW 7 |
| SW 8 | 9.09 | 8.97 | 100 | 36 | 8.0 | 8.02 | 8.12 | SW 8 |
| SW 10 | 11.37 | 11.23 | 112 | 40 | 10.0 | 10.02 | 10.12 | SW 10 |
| SW 12 | 13.65 | 13.44 | 125 | 45 | 12.0 | 12.03 | 12.14 | SW 12 |

All technical data refer to the measure mm

